


TRENCH

TEST PIT

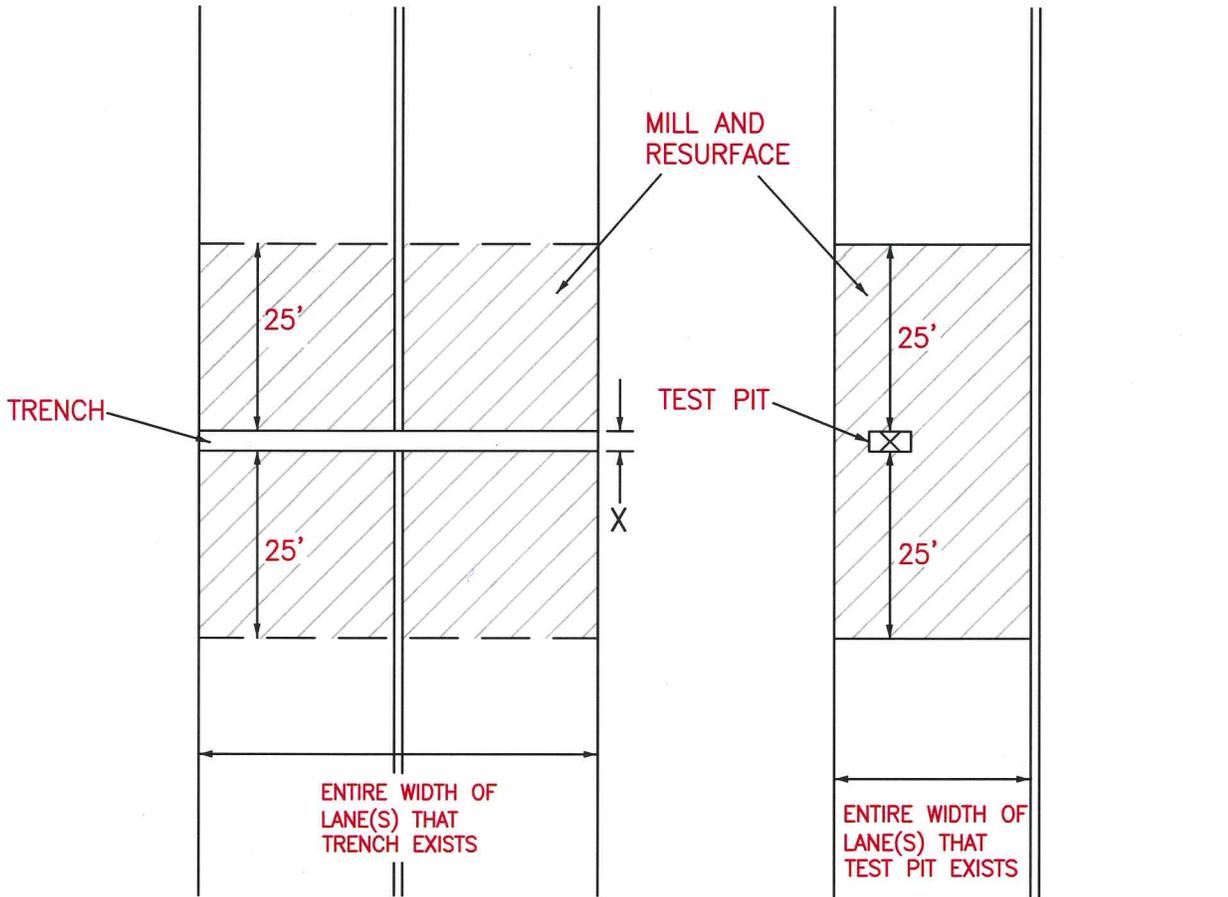


NOTES:

1. ALL HOLES IN STREET MUST BE FILLED WITH #57 STONE TO TOWN STANDARD EQUIVALENT ASPHALT DEPTH (8") AND ROLLED/TAMPED IN 6" LIFTS.
2. PATCH ALL HOLES AND/OR TRENCHES WITH 4" BASE (19-25MM), 2" BINDER (9MM), AND 2" SURFACE (9MM)
3. MILL 2" AND RESURFACE FULL WIDTH OF ANY TRAVEL LANE AND/OR SHOULDER THAT HAS ANY PART OF THE CUT; LENGTH OF MILLING/RESURFACING SHALL BE LENGTH OF CUT (X) PLUS 25' EACH WAY.
4. $L_{cut} = X + 25' + 25'$

PATCHING & RESURFACING REQUIREMENT

NTS

	The Town of Mount Airy, Maryland  APPROVED	PATCHING & RESURFACING REQUIREMENT	By: MDH	Date 7/21/10
			Standard Detail No. R-16	