

NOTE:

1. CONCRETE SHALL CONFORM TO MD S.H.A. STANDARD SPECIFICATIONS.

BOTTOM OF TRENCH


REINFORCING REQUIRED ONLY IF SOIL IS UNSTABLE OR UNDERCUTTING IS REQUIRED.

CONCRETE ENCASEMENT

NTS

NOTE:

1. STONE SHALL CONFORM TO MD S.H.A. STANDARD SPECIFICATIONS FOR GRADATION NO. 4
2. #57 STONE BEDDING SHALL BE PROVIDED UNDER ALL PIPE EXCEPT CIP AND DIP

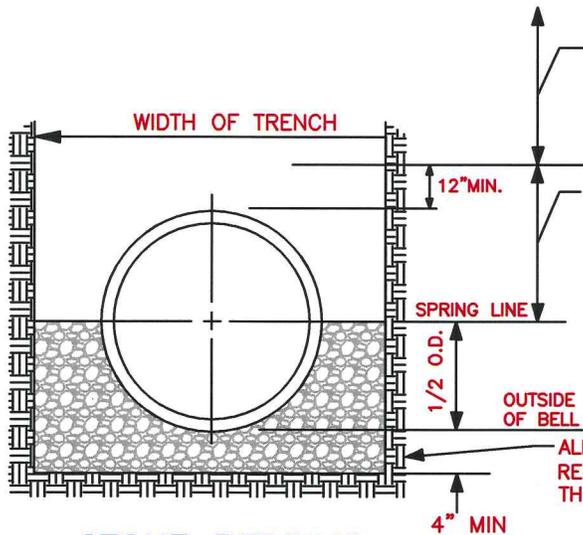

PLACE BACKFILL AND COMPACT TO DENSITY REQUIRED WITH MECHANICAL TAMPER.

SELECT BACKFILL SHALL BE PLACED WITH HAND SHOVEL IN 6" LAYERS AND COMPACTED WITH A HAND TAMPER TO THE DENSITY AS REQUIRED BY THE SPECIFICATIONS.

ALL SOLID ROCK SHALL BE REMOVED WITHIN THE 4" BELOW THE PIPE INCLUDING THE BELLS.

STONE BEDDING STANDARD INSTALLATION

NTS



The Town of Mount Airy, Maryland

APPROVED

PIPE
INSTALLATION

By:
MDH

Date

7/21/10

Standard Detail No.

S-19