


TOP VIEW
NTS

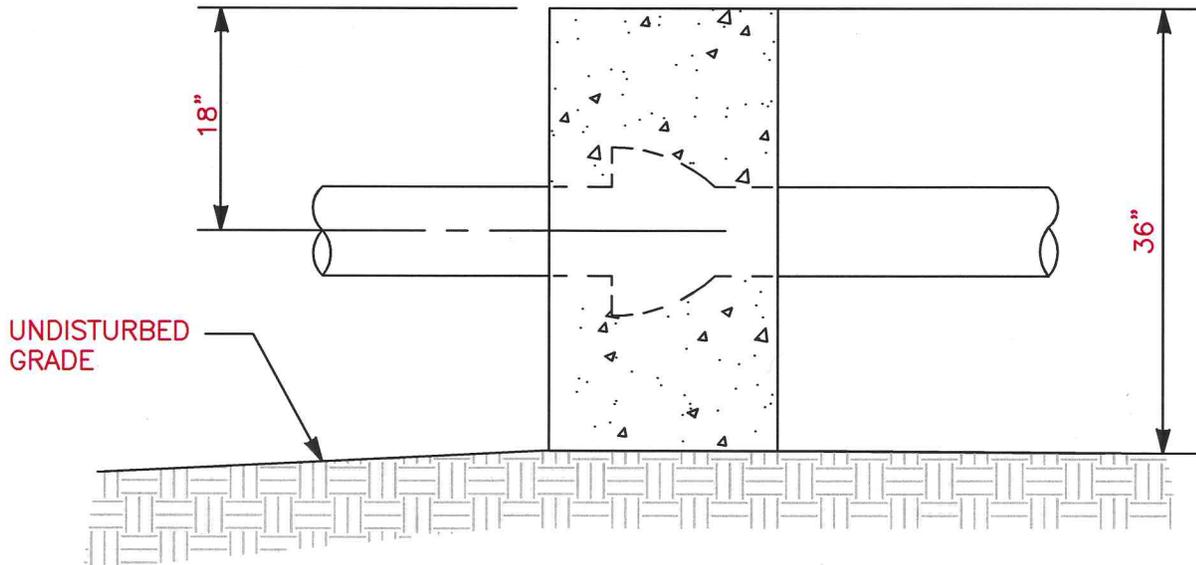

SIDE VIEW
NTS

NOTES:

USE ANCHORS WHEN GRADE EXCEEDS 20%. SEWERS SHALL BE LAID WITH A UNIFORM SLOPE BETWEEN MANHOLES. SEWERS ON 20 PERCENT SLOPE OR GREATER SHALL BE ANCHORED SECURELY WITH CONCRETE ANCHORS OR EQUAL. SPACED AS FOLLOWS:

1. NOT OVER 36 FEET CENTER TO CENTER ON GRADES 20 PERCENT AND UP TO 35 PERCENT.
2. NOT OVER 24 FEET CENTER TO CENTER ON GRADES 35 PERCENT AND UP TO 50 PERCENT.

TYPICAL CONCRETE ANCHOR
NTS



The Town of Mount Airy, Maryland

APPROVED *[Signature]*

TYPICAL CONCRETE ANCHOR

By:
MDH

Date

7/21/10

Standard Detail No.

S-23